







BITUMIEN

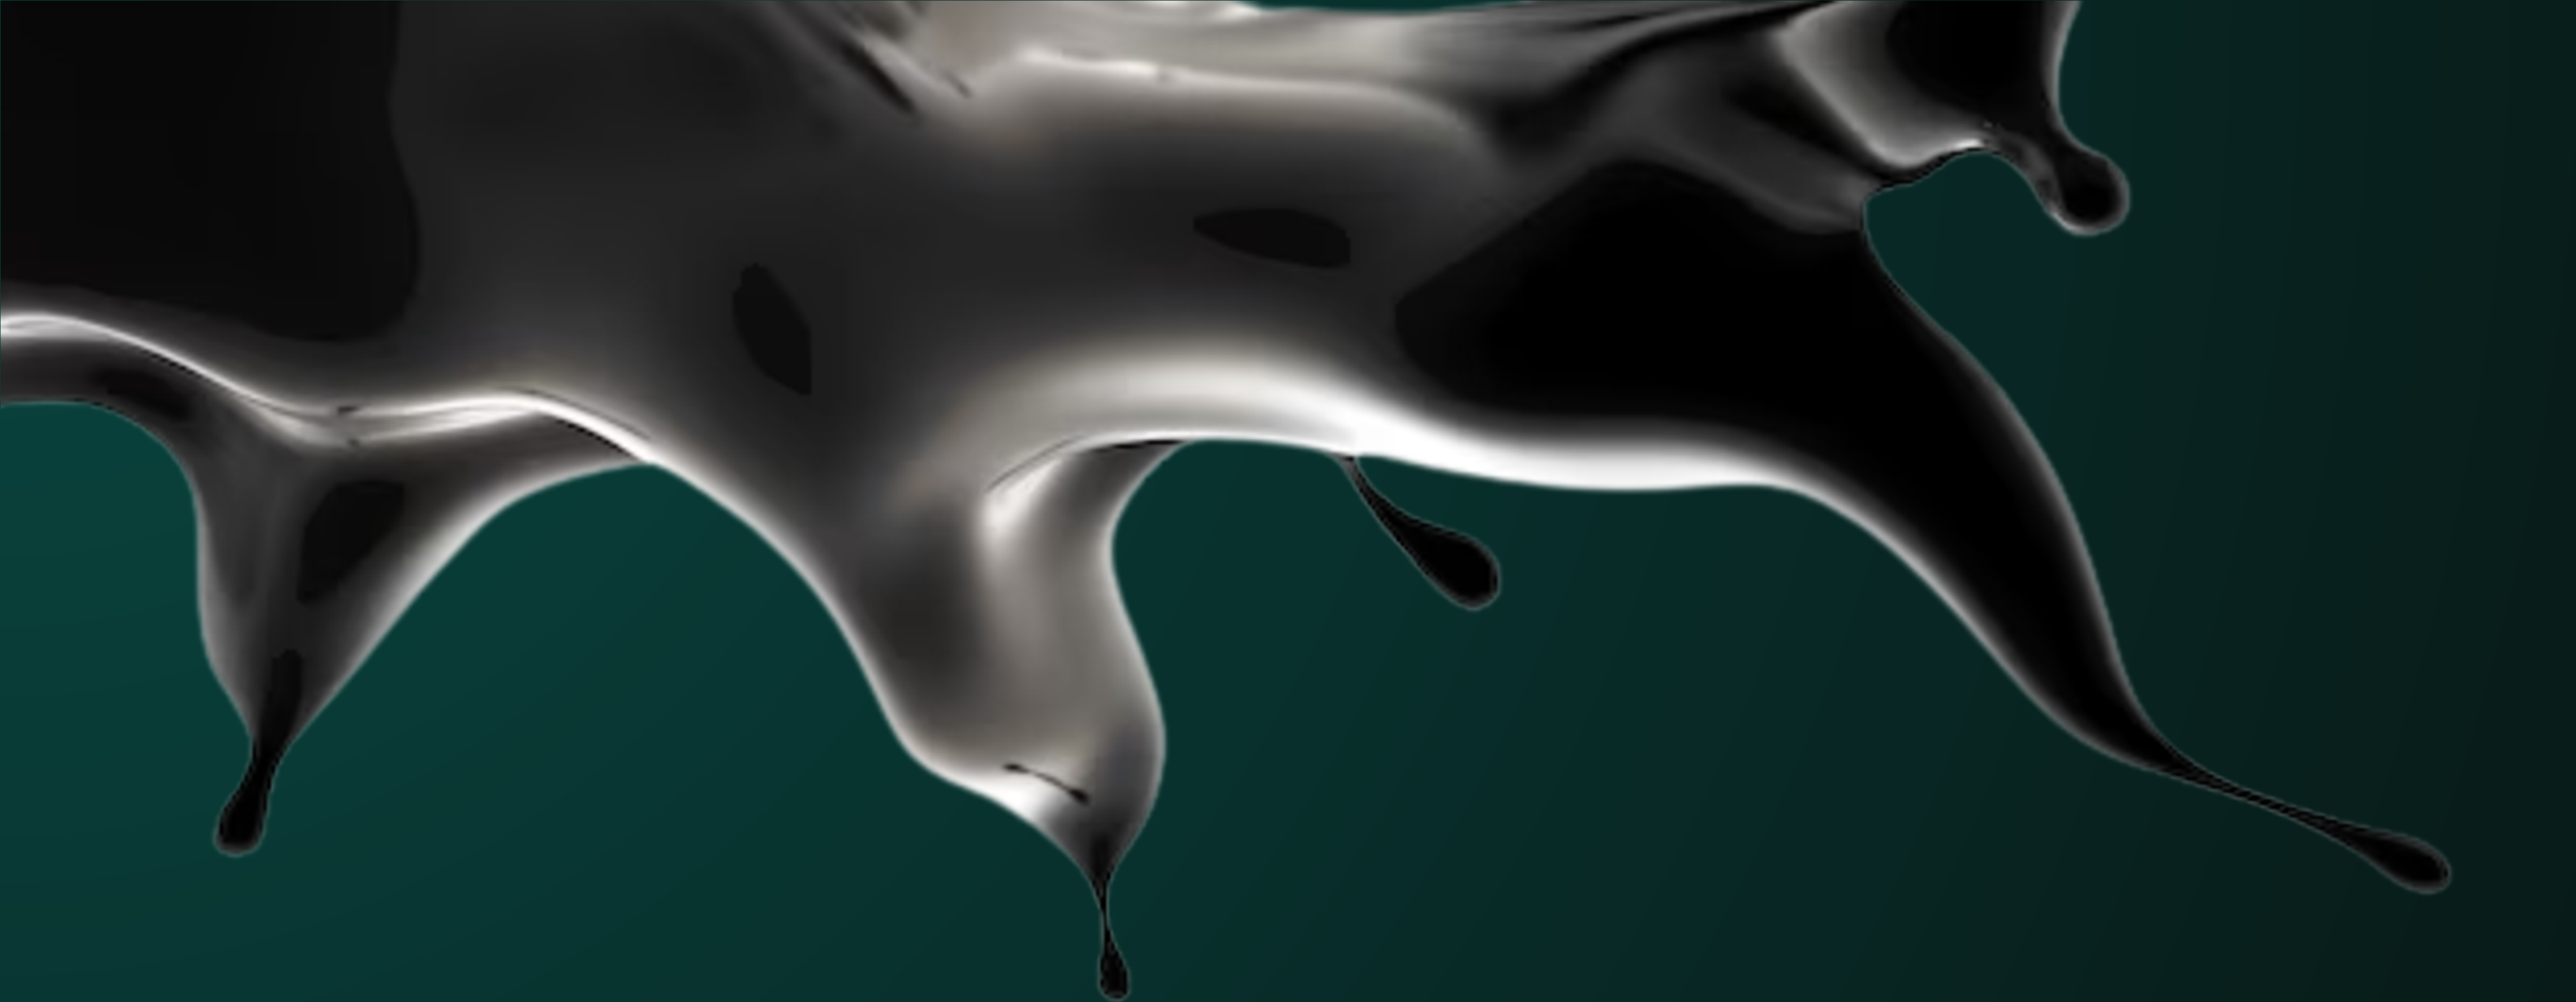

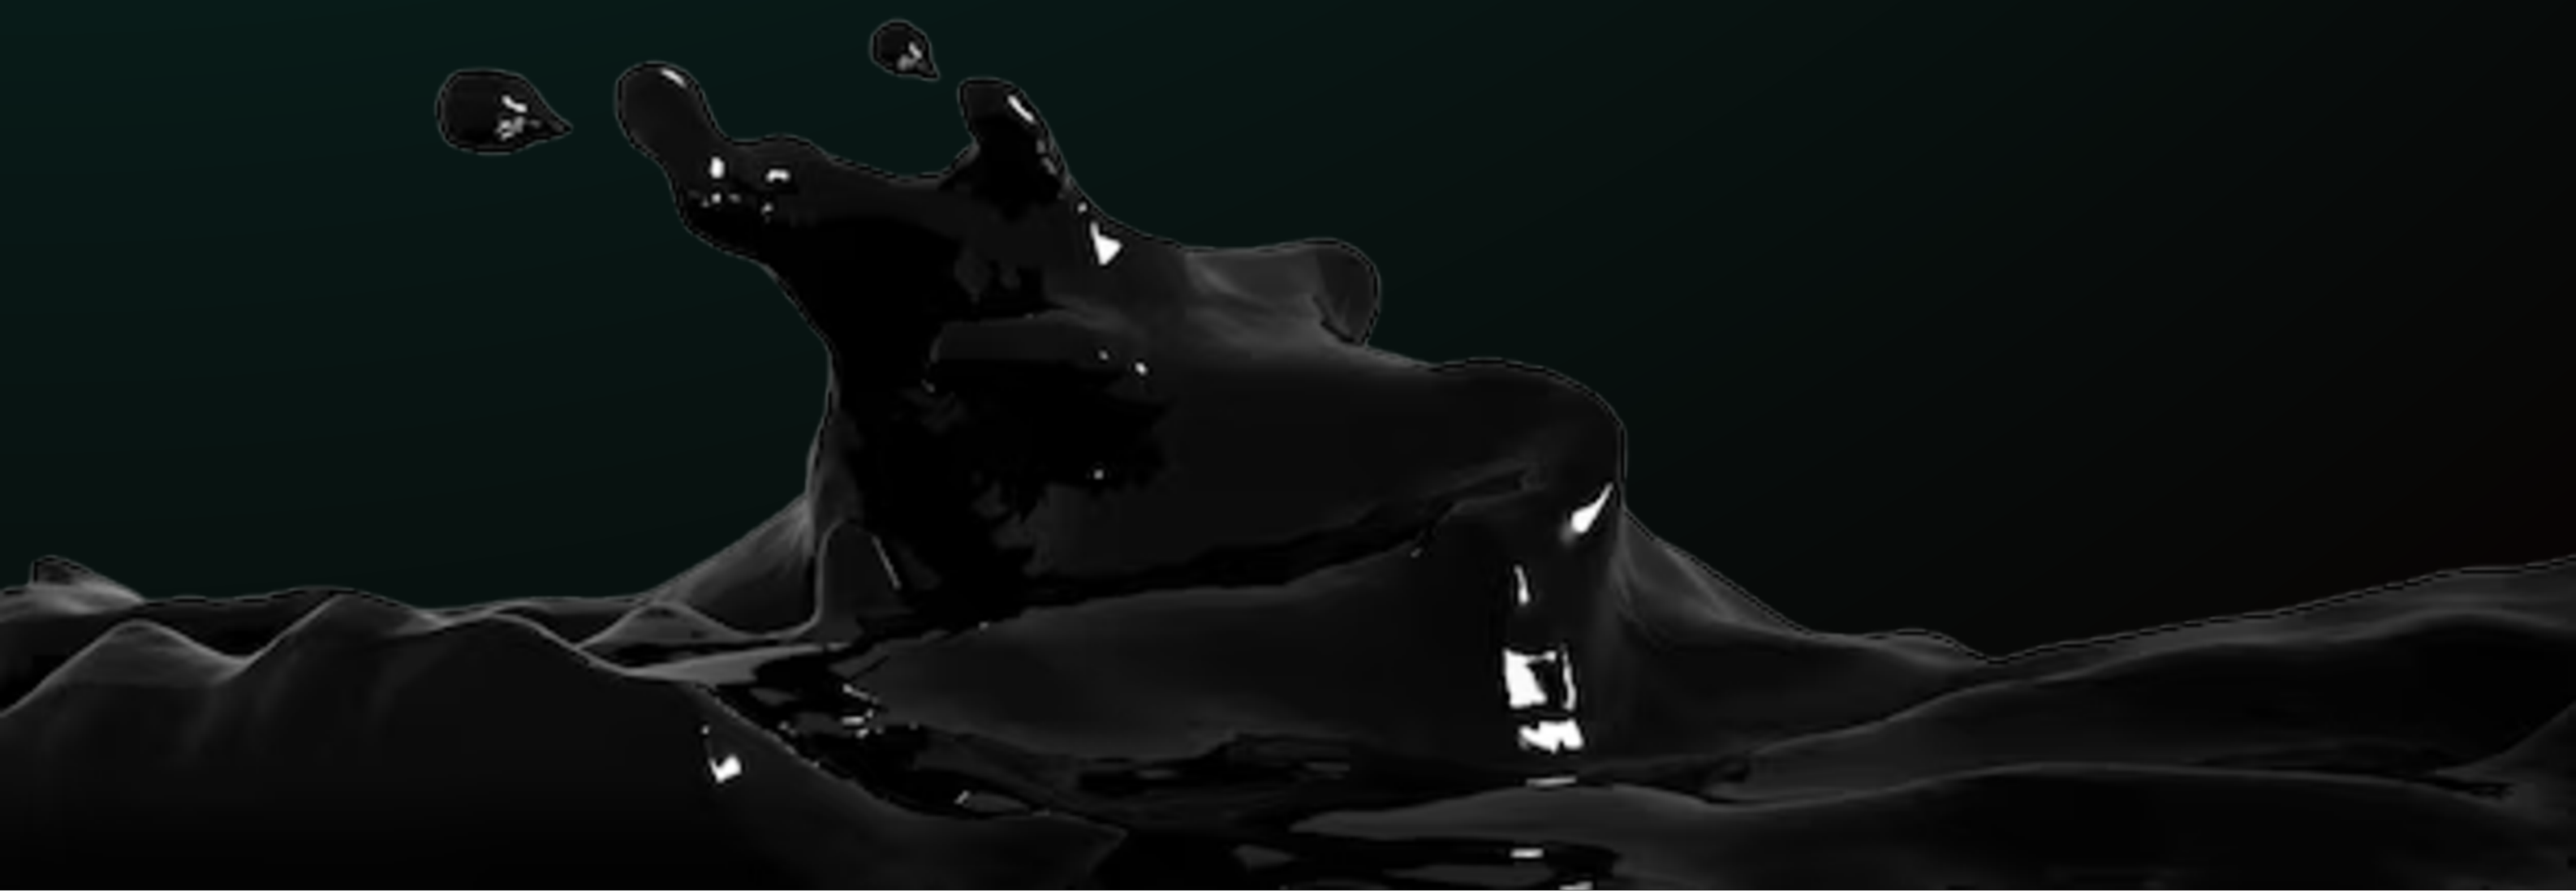

آزمایش	روش آزمایش	30-40	40-50	60-70	85-100	100-120
دانسیته	ASTM D-7	06/1-01/1	06/1-01/1	06/1-01/1	5 0/1-1	04/1-01/1
درجه 25C، mm/10 در نفوذ	ASTM D-5	30-40	40-50	60-70	85-100	100-120
°C نقطه نرمی	ASTM D-36	55-63	52-60	49-56	45-52	42-49
°C cm کشش پذیری در 25	ASTM D-113	Min 100	Min 100	Min 100	Min 100	Min 100
°C نقطه اشتعال	ASTM D-92	Min250	Min250	Min250	Min250	Min250
%wt. حلالیت در دی سولفید	ASTM D-4	5/99	5/99	5/99	5/99	5/99
تست لکه	AASHTO T 102	منفی	منفی	منفی	منفی	منفی
%wt. افت وزنی بر اثر حرارت	ASTM D-6	Max 2 /0	Max 2 /0	Max 2 /0	Max 2 /0	Max 2 /0
%، اثر افت نفوذ بر حرارت	ASTM D-6-D-5	20 Max	Max20	Max20	Max20	Max20

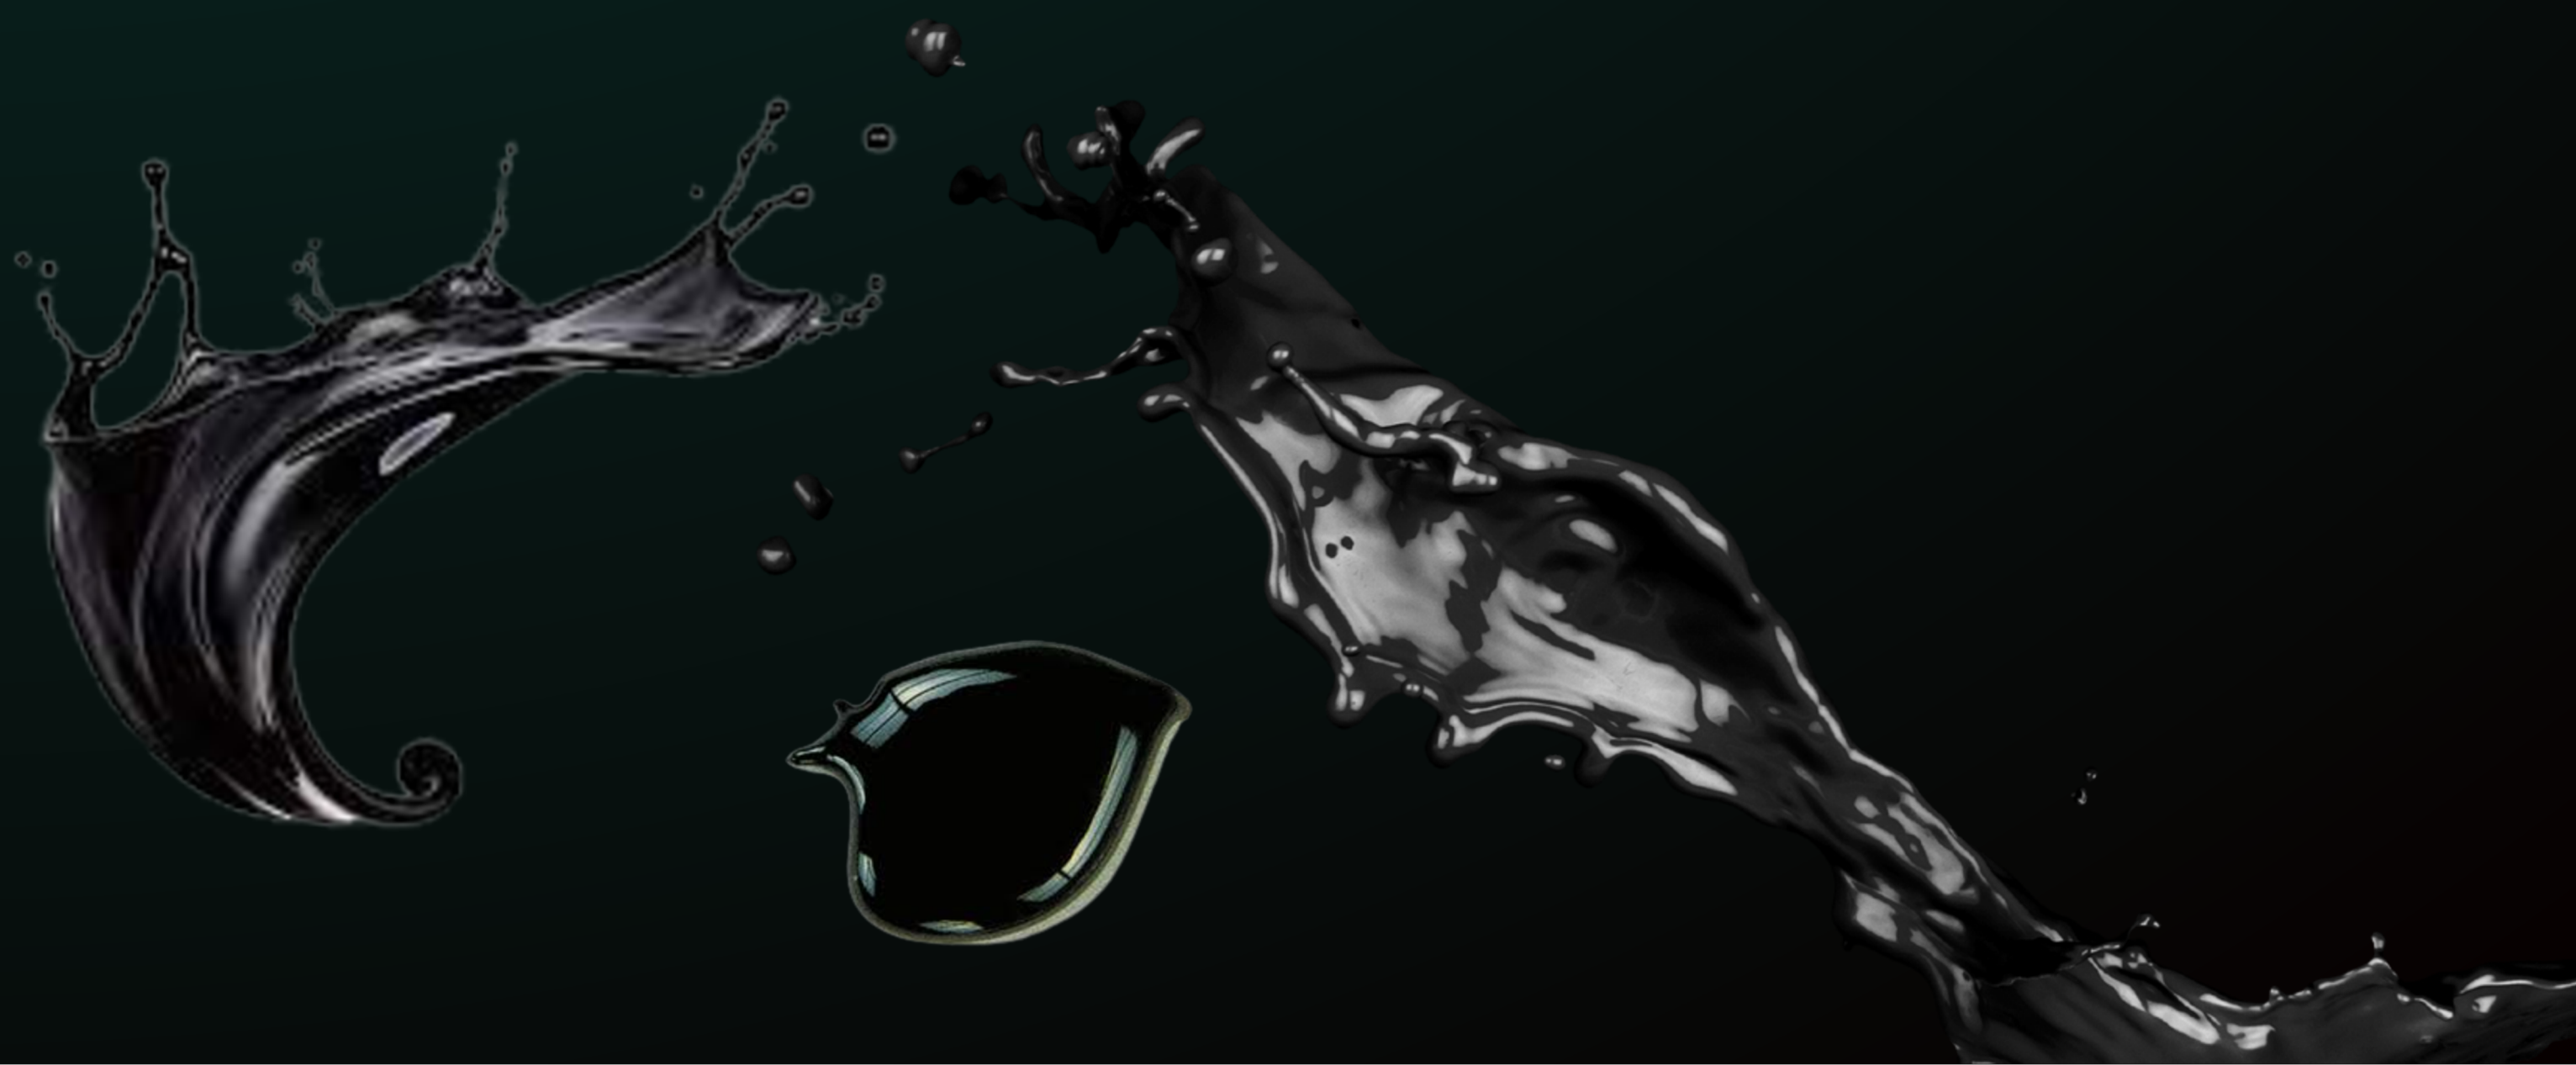

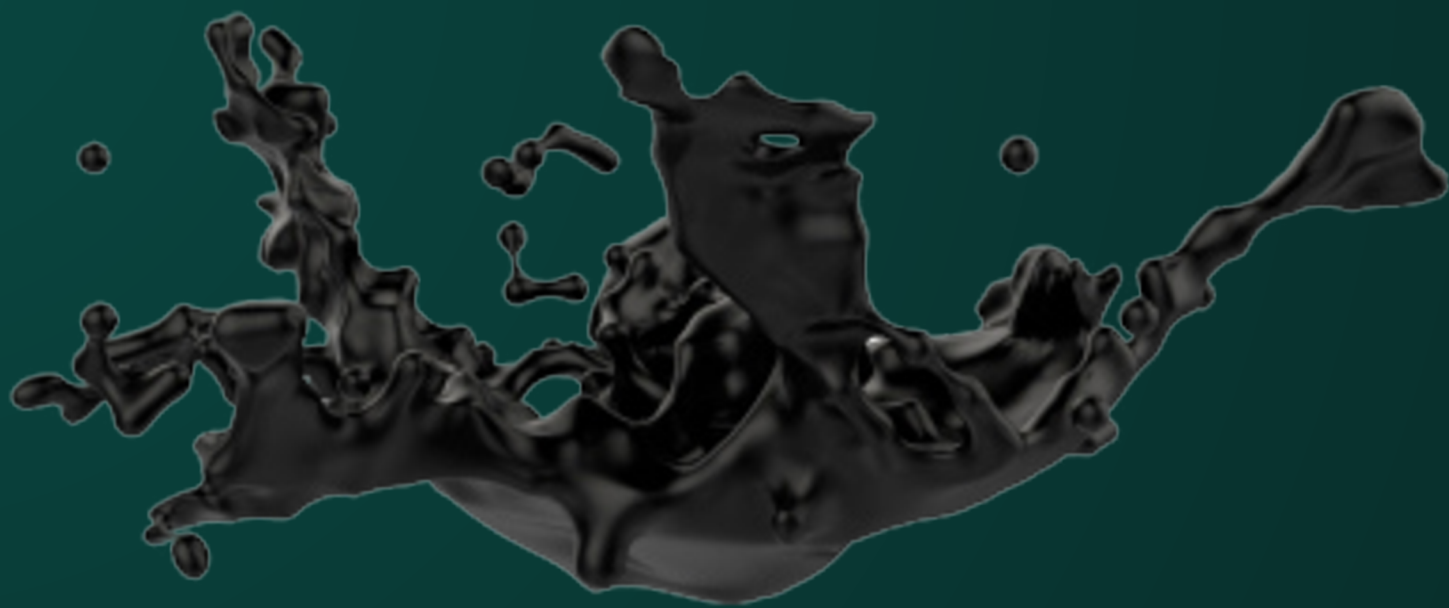

بشکه

Unit	Quantity	Property
mm	0.6	Body Plate Thickness
mm	0.6	Top & Bottom Plate
cm	100	Thickness Height
cm	50±2	Diameter
	Center	Lid Hole Position
cm	20	Lid Hole Diameter
Kg	182.5±2.5	Net Filling Capacity
Kg	9.5±0.2	Empty Drum Weight
	Furnace Black	Color



جامبوبگ خودایستا

Property Quantity Unit
Weight 1000-1300 kg
Material of outer bag 3-PLY PP fabric
Material of outer bag Special-purpose film
Storage Time Up 12 month
Heating Requirement No
Other spec: Resistant against rain
Resistant against ultraviolet radiation



جامبوبگ سازه ای

Property Quantity Unit
Weight 1000-1300 kg
Material of outer bag 3-PLY PP fabric
Material of outer bag Special-purpose film
Storage Time Up 12 month
Heating Requirement No
Other spec: Resistant against rain
Resistant against ultraviolet radiation



جامبوبگ قفسی

Property Quantity Unit
Weight 1000-1300 kg
Material of outer bag 3-PLY PP fabric
Material of outer bag Special-purpose film
Storage Time Up 12 month
Heating Requirement No
Other spec: Resistant against rain
Resistant against ultraviolet radiation

